


Andover Street (MA Route 133) at River Road Intersection Improvements PW-18-20

Project Details

This project involves the upgrade of the intersection of Andover Street (MA Route 133) and River Road. The proposed improvements include the installation of a new fully-actuated traffic signal at the intersection, dedicated turning lanes, new and extended vehicle approach lanes, realignment of the Walgreen's driveway, new sidewalks, new ADA compliant wheelchair ramps, new bicycle lanes, new signage and pavement markings, granite curbing, new drainage structures and piping, and repaving of the roadway. The improvements will extend approximately 1,875' along Andover Street and 500' along River Road. Portions of the improvements extend into the City of Lowell on Andover Street. The project is Federally-funded and State-funded through the Transportation Improvement Program (TIP).

J. Tropeano, Inc. is the contractor for this project. The project is being managed by the Massachusetts Department of Transportation (MassDOT).



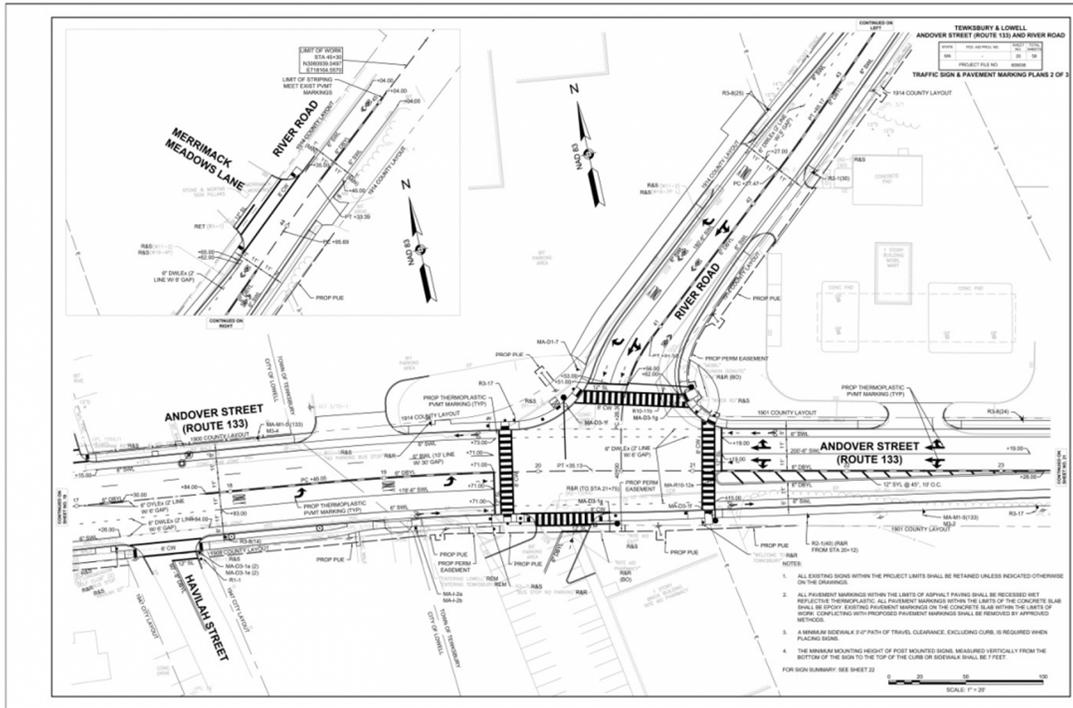

Project Schedule

Construction work began on this project in November 2020. Construction is expected to be completed by September 23, 2024.

Roadway Closures/Detours

Please follow here for updates on Roadway Closures and Detours.

PROJECT UPDATES

Project Update (Updated 3/31/2021)

Starting April 1, 2021, J. Tropeano Inc. will resume work on the Andover Street at River Road MassDOT Intersection Improvement Project. Work is anticipated to continue throughout the entire 2021 construction season. Work hours are typically 7 AM to 3:30 PM Monday through Friday. One lane of alternating traffic is anticipated during construction, when possible. Significant delays can be anticipated, and motorists are advised to avoid the area and seek alternate routes if available.

Project Update (Updated 7/12/2021)

Starting Monday, July 19, 2021, pavement reclamation work will commence on Andover Street and River Road. Pavement Reclamation is the process of pulverizing the existing roadway surface. This pulverized surface will then be graded and compacted to be used as the subbase for the new asphalt pavement. Pavement Reclamation is anticipated to take four to five days. Roadway Paving is tentatively scheduled to begin the week of August 2, 2021. One lane of two-way alternating traffic is anticipated during both the Pavement Reclamation and Paving. Significant delays are anticipated, and motorists are advised to avoid the area and seek alternate routes if available.

Project Update (Updated 1/28/2022)

Construction is on hold for the winter and the construction season will resume on April 1, 2022.

Project Contacts

If you have any questions, please contact Andrew Stack, Project Manager at (978) 640-4440 x256 or astack@tewksbury-ma.gov.